

# User Manual

## Dual 4K Universal USB-C Docking Station

Part #: A01200



**CODi**  
+1 800.263.4462  
custsupport@codiworldwide.com

### Copyright

No part of this publication may be reproduced in any form by any means without prior written permission. Regardless of any direct acknowledgment elsewhere in the body of this document, CODi hereby acknowledges that all trademarks, registered trademarks, service marks, and other protected names and/or symbols contained in this manual and related documents are the property of their respective holders.


### System Compatibility

- Compatible with Windows, macOS, and ChromeOS
  - Supports select phones/tablets with DisplayPort functionality
- \*Note:** consult host device's manufacturer for specific compatibility details

### In the Box

- (1) USB-C Docking Station
- (1) USB-C to USB-C Cable (E-Mark Chip)
- (1) USB-A 3.0 to USB-C Cable
- (1) User Manual
- (1) DC20V/6.5A 130W Power Adapter

### Product Ports

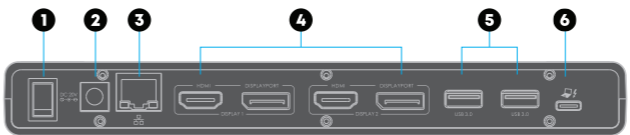

- 1** ON/OFF Power Switch
- 2** DC 20V Power In Port
- 3** (1) Ethernet Port  
Adaptive 10/100/1000Mbps Ethernet
- 4** (2) HDMI 2.0 Ports  
Max Resolution: 4K@60Hz (3840\*2160)  
Backward compatible with 2K, 1080P, 720P, etc.  
(2) DisplayPort 1.2 Video Output Ports  
Max Resolution: 4K@60Hz (3840\*2160)  
Backward compatible with 2K, 1080P, 720P, etc.
- 5** (2) USB-A 3.2 Gen 1 Ports  
Data transfer speeds up to 5Gbps
- 6** (1) USB-C Port  
⚡ Supports power delivery to host device

### Product Ports (continued)



- 7** (2) USB-A 3.2 Gen 1 Ports  
"USB 3.0" port with indicates fast charging support
- 8** (2) USB-C 3.2 Gen 1 Ports  
Data transfer speeds up to 5Gbps
- 9** 3.5mm Audio Output Port
- 10** 3.5mm Mic Input Port
- 11** K-Lock Lock Slot (on side)

#### WEEE Directive & Product Disposal



At the end of its serviceable life, this product should not be treated as household or general waste. It should be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

### Display Options


Connect your first display in either the HDMI or the DisplayPort port that is in the section labeled "Display 1" and your second display in either the HDMI or the DisplayPort port in the section labeled "Display 2".



*\*You CAN NOT plug two displays into both ports of the same section.*


#### Windows:

- One or two extended displays: max display resolution of 4K@60Hz
- One or two mirrored displays: max display resolution of 4K@60Hz
- One extended display that can be mirrored to a second display: max display resolution of 4K@60Hz
- One extended display, one mirrored display: max display resolution of 4K@60Hz

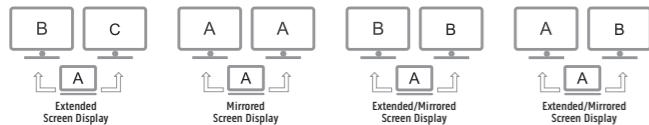


#### macOS:

- One or two extended displays: max display resolution of 4K@60Hz
- One or two mirrored displays: max display resolution of 4K@60Hz
- One extended display that can be mirrored to a second display: max display resolution of 4K@60Hz
- One extended display, one mirrored display: max display resolution of 4K@60Hz

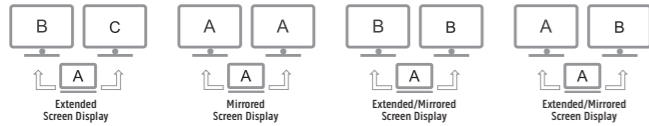

#### ChromeOS:

- One or two mirrored displays: max display resolution of 4K@60Hz
- One or two extended displays: max display resolution of 4K@60Hz



### Additional Product Information

- For full HDMI/DisplayPort functionality, make sure that your DisplayLink drivers are up-to-date.

To install/update DisplayLink, visit:  
<https://www.codiworldwide.com/downloads-A01200>

**Note:** if you are running macOS 13 (Ventura) and using a preinstalled version of DisplayLink, you may not get any video on your displays after initial login/device wake up once the dock is plugged into your host device. To resolve this, update your DisplayLink Manager to the latest version.

- When operating, dock temperature may reach 110°F (43°C) - this is within normal operating temperature.

### Warranty Information

CODi offers a non-transferable, 1 Year Limited Warranty, from date of purchase, to the original purchaser, who has properly registered the Product through [www.codiworldwide.com/product-registration](https://www.codiworldwide.com/product-registration).



CODi warrants that all products will be free from defects in workmanship and materials under normal use, for 12 months, unless otherwise specified in a Product Specification Sheet ("Limited Warranty").

